

**JOINT APPLICATION AND NOTIFICATION
U.S. ARMY CORPS OF ENGINEERS
MISSISSIPPI DEPARTMENT OF MARINE RESOURCES
MISSISSIPPI DEPARTMENT OF ENVIRONMENTAL QUALITY/OFFICE OF POLLUTION CONTROL**

Applicant: Dodd Enterprises, LLC. -
Edwin Dodd
Mailing Address: 1434 Highland Park
Dr.
Jackson MS, 39211

Agent: On The Water, LLC - Rebecca
Gill
Mailing Address: 732 Wells Dr
Biloxi MS, 39532
Phone Number: (228) 617-3881
Email Address:
Onthewaterpiers@gmail.com

Date Submitted:

03/31/2022

DMR Permit Number:

DMR22-000238

Historic DMR Permit Numbers:

DMR22-000238

DMR File Number:

22-000213

Project Location:

10001 POINTE AUX CHENES RD
Ocean Springs, MS
Jackson County

Latitude: 30.3693

Longitude: -88.7756

Do you still need to enter a Project Location?

How will you identify the project location:

Project Information:

Project Name or Title:

Project Description: This application is to repair a Hurricane Zeta damaged pier as shown & described on the attached diagram. The existing structures that are undamaged will remain in place "as-is". There are three damaged areas on the access pier. The first damaged area (working from land to water) is a 55' section of access pier. Three pilings need to be replaced in this area. The rest of this damaged portion can be repaired by building on the existing pilings. There are two more sections of access pier out from that area that need to be repaired. Both of these sections do not need pilings and can be re-built on the existing pilings. One section is 27' long and the other section is 50' long. The end platform pier is damaged and will need to be replaced including pilings. The replacement pier will have the same dimensions as the previous pier: One open-air platform with roof measuring 24' wide by 20' deep. Roof will be less than 25' high. Then there was also a lower platform on the outside front of this pier. That platform is also to be rebuilt and will be 24' wide running along the front of the pier and will be 6' deep. The four existing mooring pilings to the East of the pier to remain "as-is". All construction to be in the same footprint as the existing Zeta damaged pier.

Project Purpose and Need: This is to repair an existing private residential pier that was damaged by Hurricane Zeta.

Intended Use: Residential

Will the Proposed Project have a Public Benefit?: No

Increased tax base:

Increased employment:

National security benefits:

Improved habitat:

Other:

Does Project area contain any marsh Vegetation?: No

What measures will be taken to reduce detrimental off-site effects to the Coastal Wetlands during and after the proposed activity?: Best Management Practices

Impact Information:

Number of Impact Types	03
Impact Type:	Pier
New or Maintenance	Maintenance
Length	315
Width	5
Number of piers with the same dimensions? (Pier)	1
Method of piling installation1(Pier, Boathouse, Pilings)	1. Pile driver
Is this a component of a larger project?	No
Is any portion of this impact complete?	No
Impact Type:	Pier
New or Maintenance 2	Maintenance
Length 2	20
Width 2	24
Number of piers with the same dimensions? (Pier) 2	1
Method of piling installation1(Pier, Boathouse, Pilings) 2	1. Pile driver
Is this a component of a larger project? 2	No
Is any portion of this impact complete? 2	No
Impact Type:	Pier
New or Maintenance 3	Maintenance
Length 3	6
Width 3	24
Number of piers with the same	1

dimensions? (Pier) 3

Method of piling
installation1(Pier, Boathouse,
Pilings) 3 1. Pile driver

Is this a component of a larger
project? 3 No

Is any portion of this impact
complete? 3 No

Additional information relating to the proposed activity

Have any other federal, state, or local agencies issued permits or other types of approvals for the proposed project?: No

Have any other federal, state, or local agencies denied approval for the proposed project?: No

Project Schedule

Do you know the Proposed Start Date? Yes
04/15/2022

Do you know the Proposed Completion Date? Yes
05/31/2022

Do you know the Estimated Cost of the Project? No
\$75,000.00

Adjacent Property Owners:

Application Certified by: Rebecca Gill

Proposed Repairs to Existing Pier for Dodd Enterprises LLC at his residence at 10001 Pointe Aux Chenes Rd., Ocean Springs, MS 39564




West Neighbors:
 10009 Pointe Aux Chenes Rd.
 Ocean Springs, MS 39564
 Owned by:
 Stephen H. Holley
 8717 Edgewater Blvd.
 Ocean Springs, MS 39564

*Note: Existing Damage
 Caused by
 Hurricane Zeta*

Subject Property:
 10001 Pointe Aux Chenes Rd.
 Ocean Springs, MS 39564
 Owned by:
 Dodd Enterprises, LLC.
 1434 Highland Park Dr.
 Jackson, MS 39211

East Neighbors:
 9825 Pointe Aux Chenes Rd.
 Ocean Springs, MS 39564
 Owned by:
 Downing Properties, LLC.
 150 Broadway St, Apt. 915
 New Orleans, LA 70118

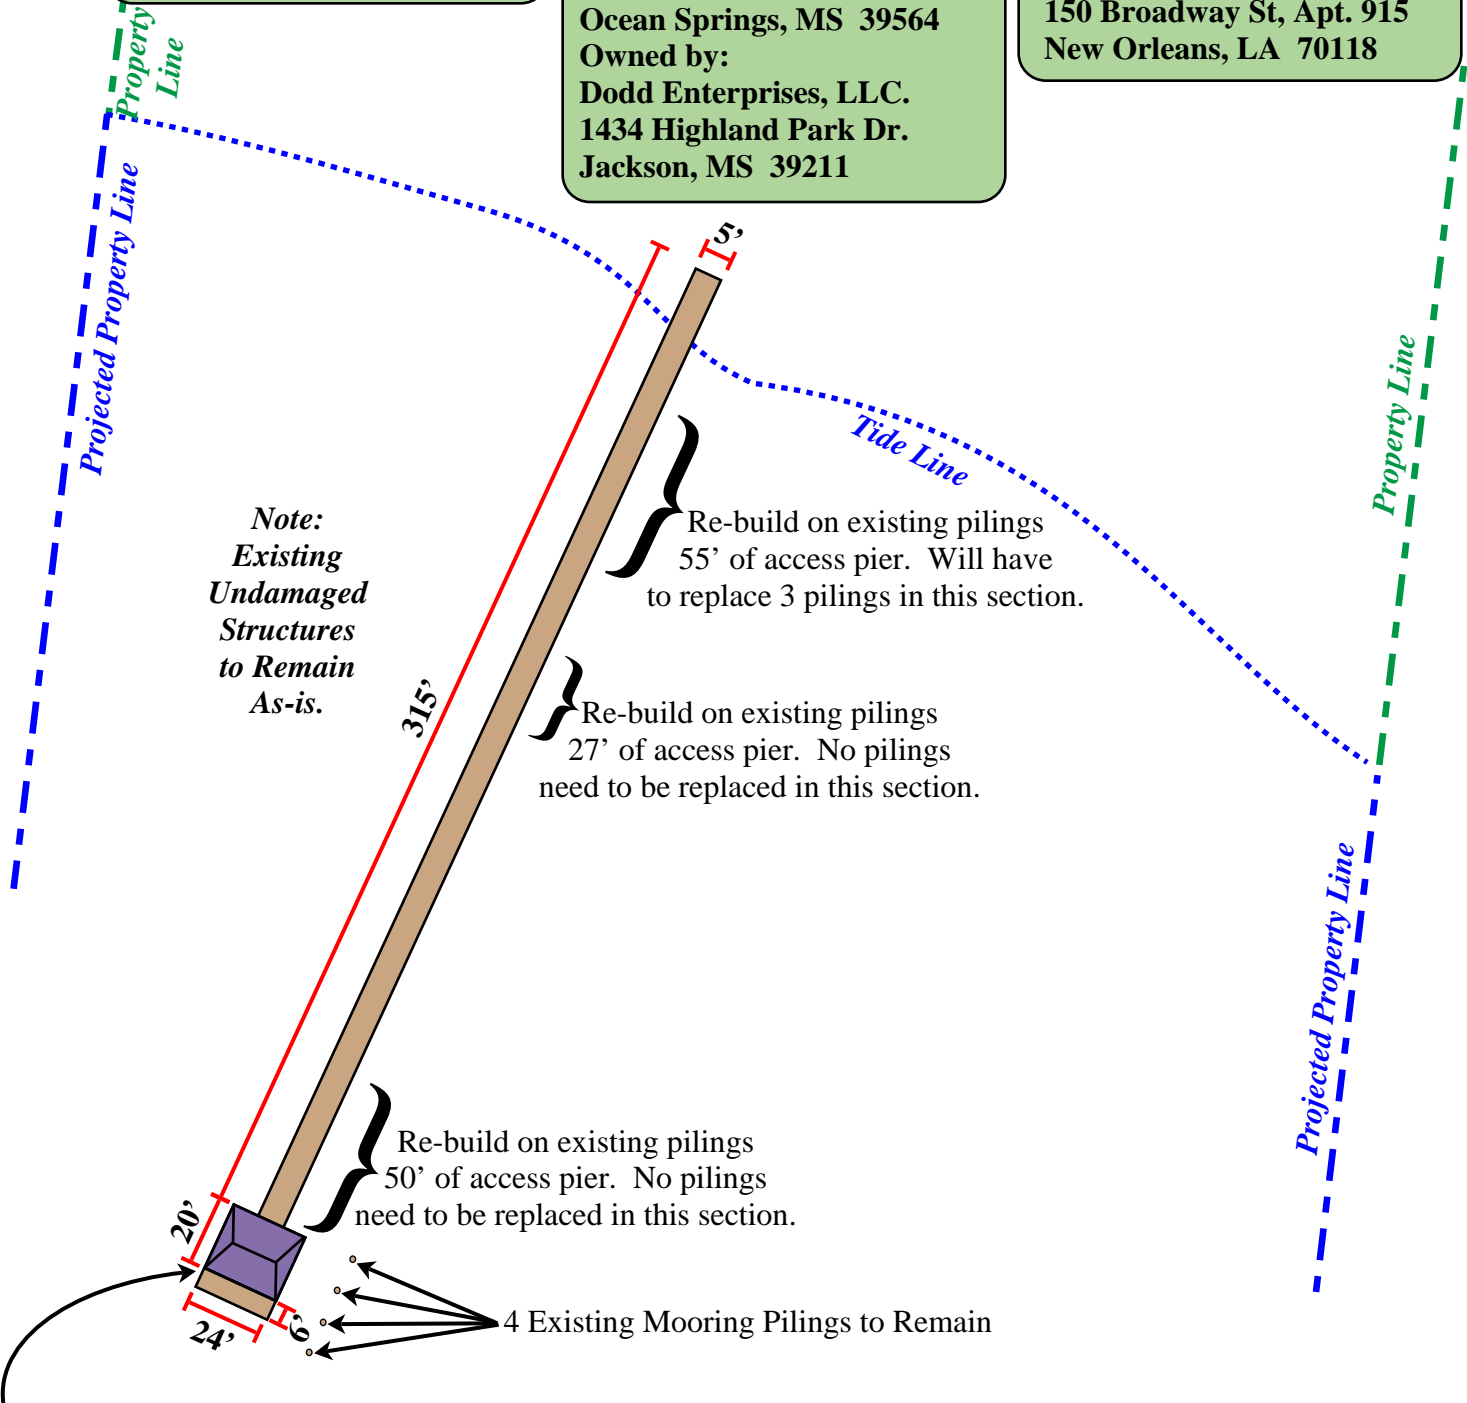

Rebuild (including pilings)
 24'x20' Open-Air End Platform Pier with Roof and
 Lower Uncovered 6'x24' Pier Platform on outside of pier.
 All construction to be in the same footprint as existing Zeta damaged pier.